



## MODELS:

MKC23GR / MKC58GR / MKC68GR / MKC90GR

# Direct Draw Keg Coolers

## Standard Features

- Stainless steel exterior & interior
- Dixell digital controller
- Maintains temperatures between 33°F – 40°F
- Heavy duty Embraco compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- Stainless steel drip tray(s)
- Recessed door handle(s)
- Dual tap tower(s) standard
- Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Manifold and ball taps included
- Door lock(s) standard
- Pre-installed casters

Model#	Sixth Barrel	Quarter Barrel	Slim Quarter	Half Barrel
MKC23GR	4	1		1
MKC58GR	4	2	3	2
MKC68GR	6	3	4	3
MKC90GR	8	4	6	4



MKC23GR



MKC58GR



MKC68GR



MKC90GR

For the best results of food preservation we recommend setting your refrigerator between 33 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)  
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)






## SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
MKC23GR	1	7.1	3.5	2.3	115/60/1	1/7	R290	23×31 <sup>1/10</sup> ×39 <sup>3/10</sup>	132	188
MKC58GR	2	17.3	2	2.3	115/60/1	1/7	R290	57 <sup>4/5</sup> ×28 <sup>1/10</sup> ×40 <sup>1/10</sup>	209	243
MKC68GR	2	21.5	2	2.3	115/60/1	1/7	R290	68×28 <sup>1/10</sup> ×40 <sup>1/10</sup>	234	291
MKC90GR	3	30.1	2	2.8	115/60/1	1/5	R290	89 <sup>3/10</sup> ×28 <sup>1/10</sup> ×40 <sup>1/10</sup>	282	357

## PLAN VIEW


**MKC23GR**

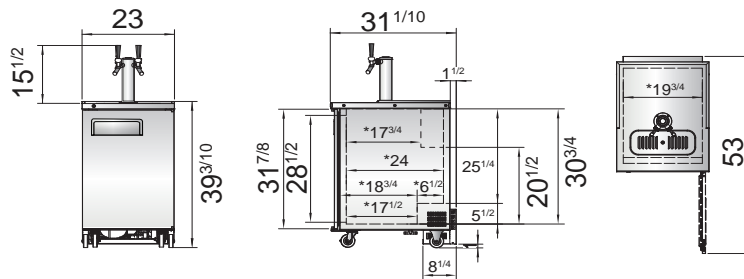






**MKC58GR**



**MKC68GR**



**MKC90GR**

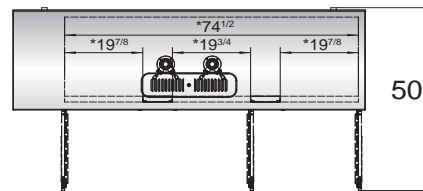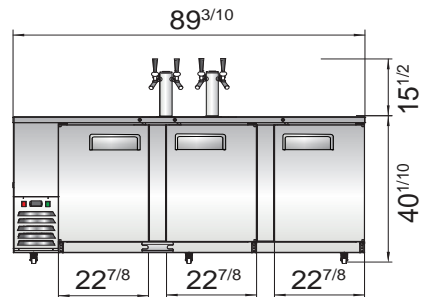

Dual tap towers

Stainless steel drip tray

Manifold and ball taps

