




## **UNIT DETAILS**

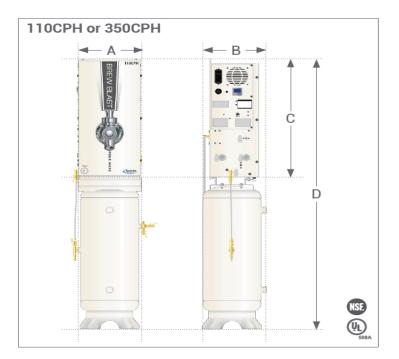

|                            | ПОСРН                            | 350CPH                           |
|----------------------------|----------------------------------|----------------------------------|
| Dimensions                 |                                  |                                  |
| A (Width)                  | 12.86"                           | 12.86"                           |
| B (Depth)                  | 10.06"                           | 10.06"                           |
| C (Height)                 | 29.5"                            | 29.5"                            |
| D (Height with Tank)       | 66.98"                           | 66.98"                           |
| Generator Weight           | 75 lbs.                          | 85 lbs.                          |
| Unit Details               |                                  |                                  |
| Filtration Technology      | Dual-bed PSA                     | Dual-bed PSA                     |
| N <sub>2</sub> Purity      | 99.8% +                          | 99.8% +                          |
| N <sub>2</sub> Production  | 4.0 CFH                          | 14.0 CFH                         |
| Max. Cups/hr. <sup>1</sup> | 110                              | 350                              |
| Mounting                   | Wall/Tank                        | Wall/Tank                        |
| Ambient Temp.              | 35 to 95° F                      | 35 to 95° F                      |
| Electrical Amps            | 110V, 15 Amps                    | 110V, 15 Amps                    |
| Noise level (dbA)          | ≤ 65                             | ≤65                              |
| Maintenance                | Annual or 1,000 hrs <sup>2</sup> | Annual or 1,000 hrs <sup>2</sup> |
| Warranty                   | One Year <sup>3</sup>            | One Year <sup>3</sup>            |

Calculations will vary based on PSI 1.

2. 3. Whichever comes first per STS terms and conditions. Extended warranty options available

